










Linear Convectector Baseboard

LCM Series



The Linear convectector baseboard heater is designed to provide safe, convenient comfort. All aspects of installation and performance are optimized for simplicity and reliability, while the benchmark Dimplex styling is maintained.

-  10-20% shorter than conventional baseboards
-  Designed to have an overall lower operating temperature, eliminating wall streaking
-  Curved edges and no spacers create a seamless and flush look against the wall; no sharp corners provide safe installation
-  Shark-fin heating element blade design provides heat transfer, quiet operation, and extends product life
-  Requires a hard-wire installation; no electrical cords to trip over
-  2.35 inches in depth, makes LCM the lowest profile residential baseboard on the market
-  Linear high-limit temperature control with automatic reset



For use with wall, or top mounted built-in thermostat (not included)



Specifications

Voltage	240V/208V, 50/60 Hz, 1-phase
Wattage	Sizes ranging from 500W to 2500W
Color	White
Finish	Powder coating resists fading and abrasion
Construction	22-gauge steel construction Front air intake; top warm air discharge Linear high-limit temperature control with automatic reset
Heating Element	Steel sheathed element provides superior life expectancy
Watt Density	Average standard watt density of 300W/ft (984W/m)
Warranty	10-year element warranty 1-year warranty on complete unit


Ordering Guide

Model #	Order SKU	Watts	Volts	BTU	Length (cm/in)	Weight (kg/lbs.)
LCM2505W31	400001256	500 / 375	240 / 208	1706 / 1280	63.5 / 25	2 / 4.4
LCM3007W31	400001257	750 / 563	240 / 208	2559 / 1919	76.2 / 30	2.3 / 5
LCM4010W31	400001258	1000 / 750	240 / 208	3412 / 2559	101.6 / 40	3.2 / 7.5
LCM5012W31	400001259	1250 / 938	240 / 208	4265 / 3199	127.0 / 50	3.7 / 8.2
LCM6015W31	400001260	1500 / 1125	240 / 208	5118 / 3839	152.4 / 60	4.4 / 9.7
LCM7520W31	400001261	2000 / 1500	240 / 208	6824 / 5120	190.5 / 75	5.4 / 11.9
LCM9025W31	400001262	2500 / 1875	240 / 208	8530 / 6398	228.6 / 90	6.4 / 14.1


DIMENSIONS

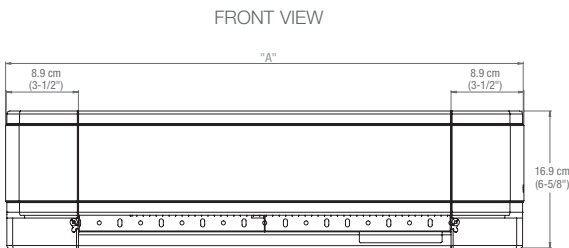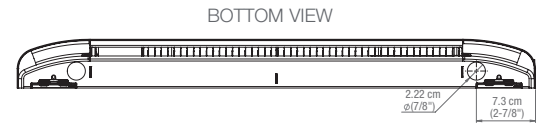

SIDE VIEW



BACK VIEW

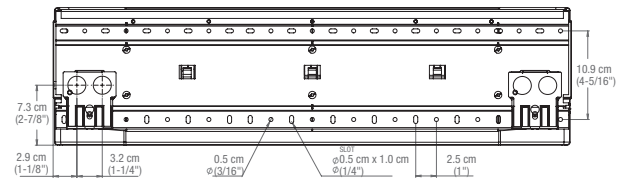

"A" - see Length in Ordering Guide

NOTE: ALL KNOCK OUTS ARE 7/8" FOR 1/2" CONDUIT