Order No.
 500002563

 Model No.
 500002563 (Ignite Evolve 100 inch)

Notes:

## Section 10309 - Manufactured Electric Fireplaces

### PART 1 GENERAL

#### 1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

#### 1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

#### 1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

#### 1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
  - 1. Preparation instructions and recommendations.
  - 2. Storage and handling requirements and recommendations.
  - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

#### 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

#### 1.6 WARRANTY

A. Provide the manufacturer's 5-year limited warranty on electrical components.

### PART 2 PRODUCTS

#### 2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
  - Base: Dimplex Electric Fireplace Glen Dimplex Americas 1367 Industrial Road Cambridge ON N3H 4W3 1-888-346-7539 www.dimplex.com
  - 2. Substitutions not permitted
  - 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.

 Order No.
 500002563

 Model No.
 500002563 (Ignite Evolve 100 inch)

Notes:

# Section 10309 - Manufactured Electric Fireplaces

### 2.2 ELECTRIC FIREPLACES

#### A. General:

- 1. Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

#### B. Pre-fabricated Electric Fireplace:

- 1. Base Product:
  - a) Dimplex Ignite Evolve Linear Electric Fireplace
  - b) Material Number: 500002563
  - c) Regulatory model number: 691411XXXX
- 2. Description: Realistic 100" linear electric fireplace
- 3. Dimensions (with included trim):
  - a) Width: 101-1/2" / 257.6 cm
  - b) Height: 16-1/2" / 41.9 cm
  - c) Depth: 5-3/4" / 14.6 cm
- 4. Framing Dimensions:
  - a) Width: 100-1/8" / 254.2 cm
  - b) Height: 16" / 40.6 cm
  - c) Depth: 3-1/2" / 9.0 cm (5-1/2" / 14.0 cm)

#### 5. Electrical:

- a) Volts: 120 V, 240 V
- b) Watts: 1500 W, 2500 W
- c) BTUs: 5000 / 8530
- d) Amps: 12.5 / 10.4
- 6. Venting: Non-venting
- 7. Operation: Flame only, flame and heat
- 8. Heating: Louver-less, fan-forced circulation
- 9. Liner: Steel
- 10. Standard features:
  - a) A new multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of seven presets.
  - b) Ambient Light Sensor automatically adjusts firebox light to suit the room or can be customized with a range of preset colors.
  - c) The multi-media bed includes acrylic crystals, tumbled glass, and driftwood logs.
  - d) LED flame technology
  - e) Hard wire capabilities 120V, 240V

 Order No.
 500002563

 Model No.
 500002563 (Ignite Evolve 100 inch)

Notes:

## Section 10309 - Manufactured Electric Fireplaces

- f) Built-in touch controls
- g) Built-in Timer Set for up to 8 hours
- h) Seamless installation and edge to edge glass
- i) Equipped with integrated smart technology that provides maintenance and operation feedback
- 11. Control options:
  - a) Flame Connect mobile app
  - b) Multi-function remote control
  - c) Built-in hidden controls (Standby, heat on/off, thermostat, brightness, flame theme)
- 12. Optional Accessories:

a) Trim Kit - X-XLFTRIM100

### PART 3 EXECUTION

#### 3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

#### 3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

#### 3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.


#### 3.4 **PROTECTION**

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

## **END OF SECTION**

## **Product Dimensions:**

FRONT - NO TRIM

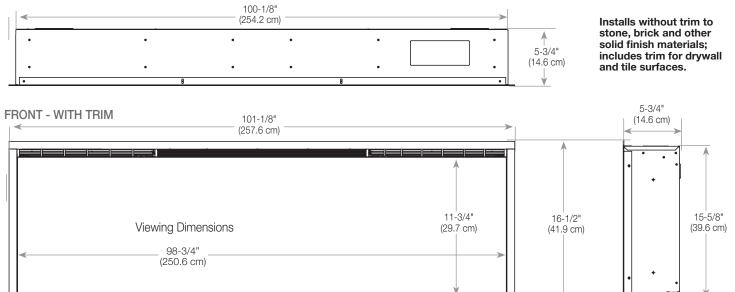

## Framing / Installation:

NOTE: Two people are required for installation.

Prepare a wall with a framed opening, following the dimensions shown in Figure 3. The fireplace can either be installed partially-recessed (2"x4" frame) or flush-mounted (2"x6" frame).

- ▲ CAUTION: Decorative finishing material (such as brick) should be limited to ½" (13 mm) overhang to ensure adequate flow of heated air out of the firebox area.
- A CAUTION: This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.

**NOTE:** For 2"x4" construction where the unit will be partially recessed, it is recommended to use XLFTRIM kit (sold separately) to accomodate the protruding portion of the fireplace.

NOTE: Wiring

entry is located on the right side at the bottom of the firebox. Plan the framing to allow routing of the power cable to this location.

