

## SINGLE-ZONE CONNEX® CONTROLLER

The wireless Single-zone CONNEX Controller operates one or more CONNEX-enabled Smart Heaters, with a simple snap installation into a décor-style wall plate.

### BENEFITS

- The built-in radio frequency transmitter eliminates the need to run wires
- Set-back button reduces temperature when room is unoccupied
- Temperature display in Celsius or Fahrenheit
- Control set temperature of one or more CONNEX-enabled Smart Heaters



### SPECIFICATIONS

Voltage	3 Volts DC
Temperature Range	0°C - 30°C, 32°F - 86°F
Dimplex CONNEX®	CONNEX Compatible
Warranty	1-year warranty

### ORDERING GUIDE


Cat. No.	Rating	Color
DPCRWS	Battery controlled (CR2032 - 3V)	White

## MULTI-ZONE PROGRAMMABLE CONNEX® CONTROLLER

The Multi-zone Programmable CONNEX Controller is a Dimplex exclusive, operating four individual heat zones wirelessly from one remote location. CONNEX wireless technology easily synchronizes multiple Linear Proportional Convectors, Precision Comfort Heaters, Precision Panel Convectors and Ceiling-mounted Heaters to one controller for precise temperature control throughout the home.

### BENEFITS

- Easy to Install
- Four Heat Zones
- Quick Set Programming
- Backlit Touch Screen
- Detachable Installation Bracket - Program wirelessly from the comfort of your chair.
- AA Batteries Included - Provides extended battery life; easy to replace.

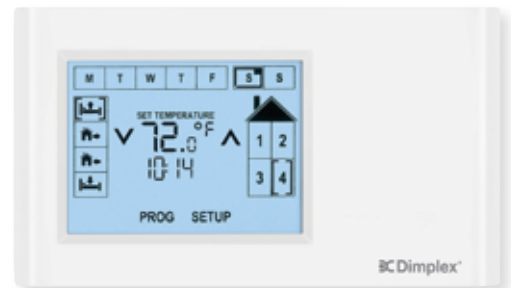

### SPECIFICATIONS

Voltage	3 Volts (2 x 1.5 Volt AA batteries included)
Dimensions	138 mm W x 85.5 mm H x 16 mm D (5.5" W x 3.375" H x 0.7" D)
Range	15.24 m (50')
Construction	White molded polymer, with an LCD touch screen for ease of programming
Installation	Supplied complete with a detachable mounting bracket for simple programming and installation.
Controls & Wiring	RF transmitter for wireless control of 4 heat zones. Touch screen programmable display allows for whole home control of all Dimplex LPC and PCH series heaters. Features 7-day and 4-event daily scheduling with "Quick Set" programming.
Warranty	3-year Limited

### ORDERING GUIDE

Cat. No.	Rating	Color
CX-MPC	Battery controlled (3V)	White