


Revillusion[®] 42" Built-in Electric Firebox

RBF42WC Weathered Concrete



Building on the innovative Revillusion[®] ThruView[™] full-depth design, the new Weathered Concrete Series strikes a more contemporary chord. The poured concrete features subtle detail and a neutral palette that provides a dramatic contrast for the lifelike flames. This playful use of an industrial material is a unique way to give any space some stylish, industrial flair.

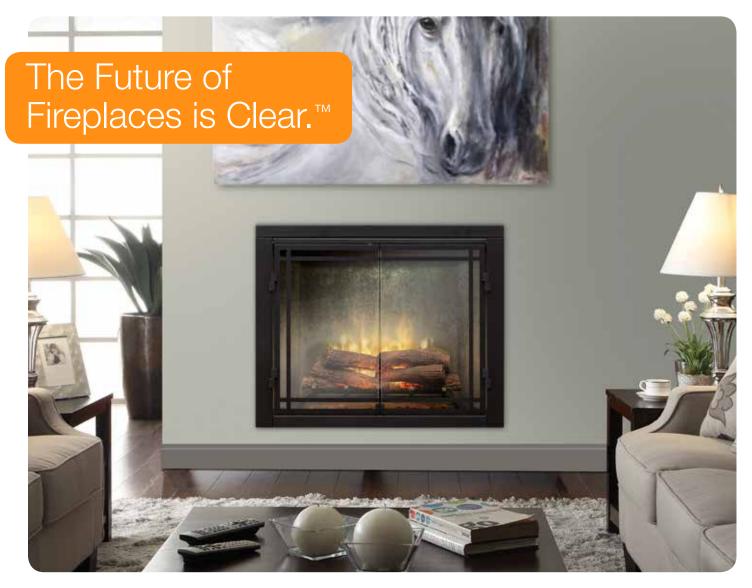



Revillusion[®] 42" Built-in Electric Firebox



88.6 / 40.2 781052 104716 2 yrs. 47-1/2 x 15 x 35-7/8

781052 107656 1 yr. 7 x 3 x 4

781052 129986 2 yr. 29-7/8 x 17-1/2 x 15

29-7/8 x 17-1/2 x 15

33.7 / 15.3 781052 108035 1 yr. 47-3/4 x 33-3/4 x 4-1/4 121.2 x 85.6 x 10.6 4.0 0.1

41.7 / 18.8 781052 108073 1 yr. 47-7/8 x 34-1/2 x 4-5/8 121.7 x 87.7 x 11.6 4.4 0.12

781052 129993 2 yr.

RBF42WC Weathered Concrete

Features Revillusion® Flame Technology Flames are larger, brighter and more random, appearing from within the logs. Mirage[™] Flame Panel Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections. ThruView[™] Full-depth Design See clear through the flames to the back of the firebox for a more authentic experience. Mood Lighting Customize the firebox glow with a choice of warm hues, plus midnight mode. Color Enhancement Adjust the flame base color to red or blue. **Realogs®** Plus A full grate of life-size hardwood-cast logs, tiered for greater depth. Full Surround Firebox More authentic day or night; 270-degree surround with natural soot markings. Brightness and Flicker Adjust light level to suit the room and choose flicker effect for enhanced firelight. **Ambient Light Sensor** Automatically adjusts firebox light to suit the room day to night. X Quick and Easy Installation Simply frame, wire and finish - no venting, gas lines or safety screens. 📚 Primary Heat Option to use 240 volt supply for up to 8,800 BTU - use as part of primary heating plan; heater also operates without flame and can be deactivated. All-season Flames Enjoy the unique charm of a fireplace 365 days a year using the flames without the heat. Direct-wire

Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available).

Low Carbon Footprint

120.6 x 38.2 x 91.2 14.8 0.4

75.9 x 44.1 x 38.1 4.52 0.13

17.8 x 7.6 x 10.2 0.05 0.0

4.52 0.13

75.9 x 44.1 x 38.1

The most sustainable fireplace option; no emissions and 100% efficient.

15 / 6.8

15/6.8

0.6/0.3

Specifications, finishes and dimensions are subject to change. †Limited warranty. ©2019 Glen Dimplex Americas

42" Built-in Electric Firebox

- Herringbone brick interior

Birch Log Set

Plug Kit

RBEGLASS42 Single Glass Pane

RBFDOOR42 42" Glass Door

Fresh Cut Log Set

RBF42

BBFI 42BB

RBFL42FC

RBFPLUG



Revillusion[®] 42" Built-in Electric Firebox

RBF42WC Weathered Concrete

Revillusi

by **Dimplex**

Accessories



RBFGLASS42 - 42" Tempered Front Glass Dimensions: 41-1/8" W x 26-5/8" H x 3/8" D (104.5 cm x 67.5 cm x 1.1 cm)



RBFL42BR - Birch Log Set Dimensions: 26-1/2" W x 11-1/8" H x 11" D (67.2 cm x 28.1 cm x 27.9 cm)



 $\begin{array}{l} {\sf RBFDOOR42-42"} \mbox{ Functional Doors} \\ {\sf with Tempered Glass} \\ {\sf Dimensions:} \\ {\sf 45-7/8"} \mbox{ W x 31-3/4"} \mbox{ H x 1-1/4"} \mbox{ D} \\ {\sf (116.5cm x 80.8cm x 3.7cm)} \end{array}$



RBFL42FC - Fresh Cut Log Set Dimensions: 26-1/2" W x 11-1/8" H x 11" D (67.2 cm x 28.1 cm x 27.9 cm)



RBFPLUG

