



Order No.	500005117
Model No.	SPK42 (VITAL SPARK 42 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

1.2 RELATED SECTIONS

- A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

1.3 REFERENCES

- A. UL - 2021
- B. CSA - C22.2 No. 46-13

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

- A. Provide the manufacturer's 1-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - 1. Base: Dimplex Electric Fireplace
Glen Dimplex Americas
1367 Industrial Road
Cambridge ON N3H 4W3
1-888-346-7539
www.dimplex.com
 - 2. Substitutions not permitted
 - 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.



Order No.	500005117
Model No.	SPK42 (VITAL SPARK 42 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

2.2 ELECTRIC FIREPLACES

A. General:

1. Provide all components and accessories required for a complete, functional unit.
2. cULus listed, file E71416.

B. Pre-fabricated Electric Fireplace:

1. Base Product:

- a) Dimplex Electric Firebox
- b) Material Number: 500005117
- c) Regulatory Model Number: ???
- d) Model Number: SPK42

2. Description: Dimplex 42" Plug-in Fireplace Firebox

3. Dimensions:

- a) Width: 43-1/4" / 109.8 cm
- b) Height: 31-1/8" / 79.0 cm
- c) Depth: 7-3/4" / 19.8 cm

4. Framing Dimensions:

- a) Width: 40-3/4" / 103.5 cm
- b) Height: 30-3/4" / 78.0 cm
- c) Depth: 9" / 23.0

5. Weight:

- a) Product Weight: 59.4 lbs / 27 kg
- b) Packaged Weight: 79.2 lbs / 36 kg

6. Electrical:

- a) Volts: 120
- b) Watts: 1,500
- c) BTUs: up to 5120
- d) Amps: 12.5

7. Venting: Non-venting

8. Operation: Flame only, flame and heat

9. Heating: Louver-less, fan-forced circulation

10. Liner: Gloss polypropylene backer

11. Standard features:

- a) Dimplex Flame Effect
- b) Adjustable flame speed



Order No.	500005117
Model No.	SPK42 (VITAL SPARK 42 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

- c) Hardwire or plug-in 120V (plug kit included)
 - d) Customizable firebox hues, mood lighting to adjust firebox light level
 - e) Built-in Timer
 - f) On-demand fan-forced heater
12. Control options:
- a) Multi-function remote control
 - b) Built-in hidden controls (Standby, heat on/off, thermostat, brightness, flame theme)
 - c) Speaker button for crackling fire sound effects
 - d) Glen Dimplex Connect app connectivity

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).

3.4 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION




Order No. 500005117
Model No. SPK42 (VITAL SPARK 42 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

Framing Dimensions:

	SPK42
A	40-3/4" (103.5 cm)
B	30-3/4" (78.0 cm)
C	9" (23.0 cm)
D	31-1/8" (79.0 cm)
E	43-1/4" (109.8 cm)
F	7-3/4" (19.8 cm)

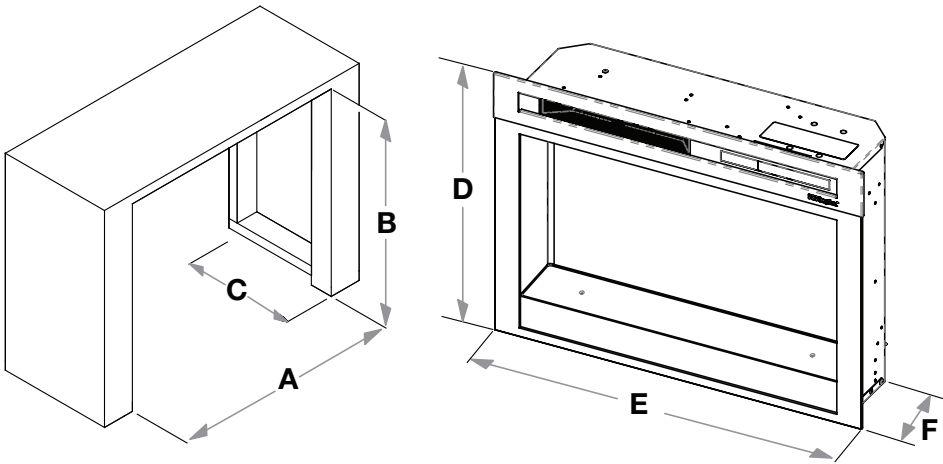

1. The Dimplex Electric Fireplace does not require any special venting. Make sure there is clearance for air circulation beneath the unit and at least 1/2" behind it.
2. To build the rough-in opening, follow the framing dimensions above.